



T-LINK™ TECHNOLOGY

BEYOND LIMITS

An advanced engineering thermoplastic resin with excellent adhesive properties for ultimate performance and processability.

FILM

DRY-TO-THE-TOUCH FOR EASY HANDLING


T-Link™ film is a dry-to-the-touch, engineered thermoplastic adhesive that demonstrates 99 % optical clarity and, therefore, does not disrupt intended color and allows for light transmission where applicable.

T-Link™ film can be processed with traditional press equipment, has a short cycle time for bonding, does not require refrigeration, and has a long shelf life. Additionally, it has a low odor and is paintable and pigmentable.

Melt Index (dg/min @ 190°C): 10

PRODUCT	GRADES	WHAT DOES IT ENABLE
FILM (L-F610)	<ul style="list-style-type: none"> - 2.5 mil Thickness* - 5 mil Thickness* 	<ul style="list-style-type: none"> - Dry, easy-to-handle product - Provides consistent and more efficient delivery of resin system for composite manufacturing

* Commercially Available

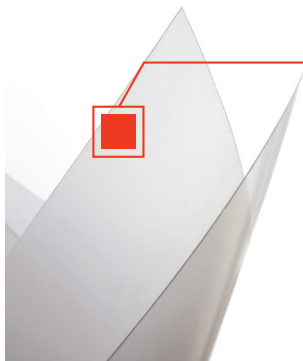

KEY PRODUCT ATTRIBUTES

- High strength, rigidity, and toughness
- High strain-to-failure – up to 40 %
- Short cycle times needed for bonding
- Long shelf life
- Can be stored at room temperature
- Flexible, clear, and low odor
- Fully thermoplastic
- Recyclable
- Repairable/formable
- Debonding/healing capability
- Paintable and printable



Scan for disclaimer

llproducts.com/t-link