



BEYOND LIMITS

T²LINK[®]

An advanced engineering thermoplastic adhesive
for ultimate performance and processability.

FILM

DRY-TO-THE-TOUCH FOR EASY HANDLING


T-Link® film is a dry-to-the-touch, engineered thermoplastic adhesive that demonstrates 99 % optical clarity. It does not disrupt the intended color and allows for light transmission where applicable.¹

T-Link® film can be processed with traditional press equipment, has a short cycle time for bonding, does not require refrigeration, and has a long shelf life. Additionally, it has a low odor and is typically paintable.

¹ Not intended for exterior UV exposure.

| PRODUCT | MELT INDEX g/min @ 190°C | THICKNESS | WHAT DOES IT ENABLE |
|---------------|-----------------------------|-------------------------------------|---|
| FILM (L-F610) | 10 10 | 2.5 mil [63 µm]* 5 mil [127 µm]* | <ul style="list-style-type: none"> - Dry, easy-to-handle product - Provides consistent and efficient delivery of resin system for composite manufacturing |

* Commercially Available

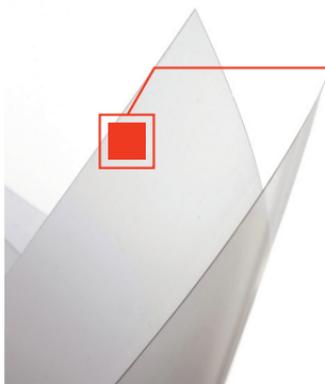

KEY PRODUCT ATTRIBUTES

- High modulus
- High strain-to-failure – up to 40 %
- Short cycle times needed for bonding
- Long shelf life
- Can be stored at room temperature
- Bonds to a wide range of dissimilar substrates
- No freezer required
- Flexible, clear, and low odor
- Fully thermoplastic
- Recyclable
- Bonding/debonding
- Paintable and printable



Scan for disclaimer

llproducts.com/t-link